

X3-TYPE (Ultra Small LOCAFLEX)

75 kVDC rated High Voltage Cable



Highly flexible, ultra small diameter, 3-conductor, 75 kVDC rated rubber insulated high voltage cable.

FEATURES

- · High flexibility.
- Ultra small diameter.
- 95% shielding braid coverage.
- RoHS & REACH compliant.


DESCRIPTION

This 3-conductor, rubber insulated high voltage cable's typical applications are:

- Medical X-ray equipment like standard X-ray, computed tomography and angiography equipment.
- Industrial and scientific X-ray or electron beam equipment like electron microscopy and X-ray diffraction equipment.
- Low power high voltage test and measuring equipment.

CONSTRUCTION X3-TYPE CABLE

(Illustration is not to scale)

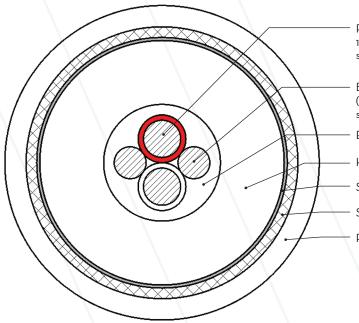

Red and white ETFE insulated conductors, 1.8mm^2 ($19 \times \varnothing 0.35 \text{mm}$), stranded tinned copper wires.

Bare conductor, 2x1.25mm² (2x50xØ0.18mm), stranded tinned copper wires.

Extruded semi-conducting layer.

High voltage insulation, EP rubber, black.

Semi-conducting Tape.

Shielding braid, 95% coverage, tinned copper wires.

PVC jacket, color: light gray.

Technical Specifications

Number of conductors	3
Rated voltage	75 kVDC
Routine test voltage (high voltage insulation)	120 kVDC / 10 min
Rated voltage (conductor insulation)	750 VACrms / 1000 VDC
Maximum conductor current	. 1.8 mm²: 18 A; 2.5mm²: 22 A
Corona level @ 75 kVDC	≤10 pC
Nominal outside diameter 13	3.2 ±0.5 mm / 0.520 ±0.020 in
Insulation resistance core to shield @ 20°C	≥1x10 ¹² Ω·m / ≥3x10 ¹² Ω·ft
Conductor resistance bare conductor @ 20°C	7.0 m Ω /m / 2.1 m Ω /ft / ±5%
Conductor resistance insul. conductors @ 20°C	10.0 m Ω /m / 3.1 m Ω /ft / $\pm 5\%$
Shield resistance @ 20°C	9.0 m Ω /m / 2.74 m Ω /ft / ±10%
Capacitance between conductors and shield \dots	150 pF/m / 46 pF/ft / ±10%
Cable min. bending radius (static installation) $\ \ .$	26 mm / 1.0 in
Cable min. bending radius (dynamic installation)	53 mm / 2.0 in
Operating temperature	10/+70°C / +14/+158°F
Storage temperature	40/+70°C / -40/+158°F
Net weight	235 kg/km

MORE INFORMATION

Varex Imaging Corporation is a leading innovator, designer and manufacturer of X-ray imaging components, which includes tubes, digital flat panel detectors and other image processing solutions, which are key components of X-ray imaging systems.

For more information, please contact a Varex Imaging sales representative in your territory. Contact details are available at www.vareximaging.com/contact-information.

Varex Imaging Corporation

Headquarters

Salt Lake City, UT Tel: 801-972-5000

Fax: 801-973-5050

Connect & Control

The Netherlands
Tel: +31 315 659150

Netherlands.CNC@vareximaging.com

©2017 Varex Imaging Corporation.

All Rights reserved.

Production of any of the material contained herein in any format or media without the express written permission of Varex Imaging Corporation is prohibited.

The data in this document is for reference only. Contents in this document are subject to change without notice.