

Making the Invisible Visible

## XRD 0822 AO, AP Flat Panel Detectors



**The Varex Imaging XRD 0822 Digital X-ray Flat Panel Detectors are part of the Varex Imaging family of 8-inch (20 cm) field of view amorphous silicon (a-Si) digital X-ray FPDs.**

### OVERVIEW

Two models of the Varex Imaging XRD 0822 digital Flat Panel X-ray Detectors (FPDs) are available:

The Varex Imaging XRD 0822 AO provides over 78 dB of dynamic range and frame rates up to 30 frames per second (fps). The enhanced performance XRD 0822 AP offers over 88 dB of dynamic range and frame rates up to 100 fps via several read-out modes. Both detectors support a broad range of energy levels from 20 keV–16 MeV and are available with several shielding and scintillator options.

Rapid system integration is accomplished via Gigabit Ethernet data communication, integrated trigger and X-ray synchronization circuitry, and a comprehensive software library for image acquisition and processing.

The wide energy range, variable frame rates and shielding options allow the XRD 0822 to meet the component requirements of applications<sup>1</sup> such as industrial non destructive testing, radiation therapy for cancer treatment, as well as veterinary and life and physical science.

We have over 20 years of experience partnering with OEMs integrating FPDs into demanding X-ray applications and can customize our product to meet your specific requirements. Let our digital imaging expertise work for you.

### FEATURES AND BENEFITS

- Radiation-hardened for harsh environments
- Real time imaging
- 200  $\mu\text{m}$  pixel pitch
- Up to 65,536 gray levels
- X-ray energies from 20 kV – 16 MV
- Selectable gain settings
- Gigabit Ethernet interface
- Superior Image Quality High Dynamic Range

### APPLICATIONS<sup>1</sup>

- Radiation Therapy, Radiosurgery, & Proton Therapy
- Industrial Non Destructive Testing & Evaluation
- Veterinary
- Life & Physical Science

## Technical Specifications

### SENSOR

Panel	Single substrate amorphous silicon active TFT/diode array
Scintillator	CsI:Tl or various Gd <sub>2</sub> O <sub>2</sub> S:Tb (GOS) fluorescent screens
Pixel Matrix	1024 × 1024 @ 200 μm pitch

### ELECTRONICS

Amplifiers	8 × 128 channel custom low noise ASICs with 2 (AO) or 6 (AP) user selectable gain settings		
ADC	14 bit (AO), 16 bit (AP)		

Read-out Mode	Matrix	Pixel (μm <sup>2</sup> )	fps	
			AO	AP
Square	1024 × 1024	200 × 200	15	25
	512 × 512	400 × 400	30	50
Rectangular	1024 × 512	200 × 400	n/a	50
	1024 × 256	200 × 800	n/a	100
Sectional	1024 × 512	200 × 200	n/a	50
	1024 × 256	200 × 200	n/a	100

### MECHANICAL

Size	29.5cm (w) × 36.0cm (l) × 2.2cm (h)
Weight	3.7 kg
Housing	Aluminum
Shielding	Integrates with shielding cassette for high energy applications (optional)

### COMMUNICATIONS

Data I/F	Gigabit Ethernet Vision
X-ray I/F	Integrated X-ray trigger control
Software	Support for 32 and 64 bit Windows® OS

### IMAGING PERFORMANCE

Lag	< 8% 1st frame
Dynamic Range	> 78 dB (AO), > 88 dB (AP)
Energy	20 kV – 16 MV

### ENVIRONMENTAL

Temperature	10 – 40°C (operating), -10 – 50°C (storage)
Humidity	10 – 90%RH (non-condensing)
Ingress	IP-65 rated (total dust and low pressure water jets protection)
Vibration	IEC/EN 60068-2-6(10-150 Hz, 0.5 g)
Shock	IEC/EN 60068-2-27(11 ms, 2 g)

### POWER

Supply	100 – 240 VAC, 50/60 Hz XRD-EPS Power Supply 215 W
Dissipation	25 W

### REGULATORY


Standards	IEC/EN-61010 – 1 IEC/EN-61236-1
Regulations	CE, RoHS

<sup>1</sup> Unless otherwise specified, Varex Imaging Flat Panel X-ray Detectors are components intended to be integrated into products by X-ray system manufacturers. System manufacturers are responsible for qualifying and validating their products for their intended uses and meeting all applicable regulatory requirements.

Contents in this document are subject to change without notice.

### MECHANICAL CHARACTERISTICS

(Dimensions in mm)

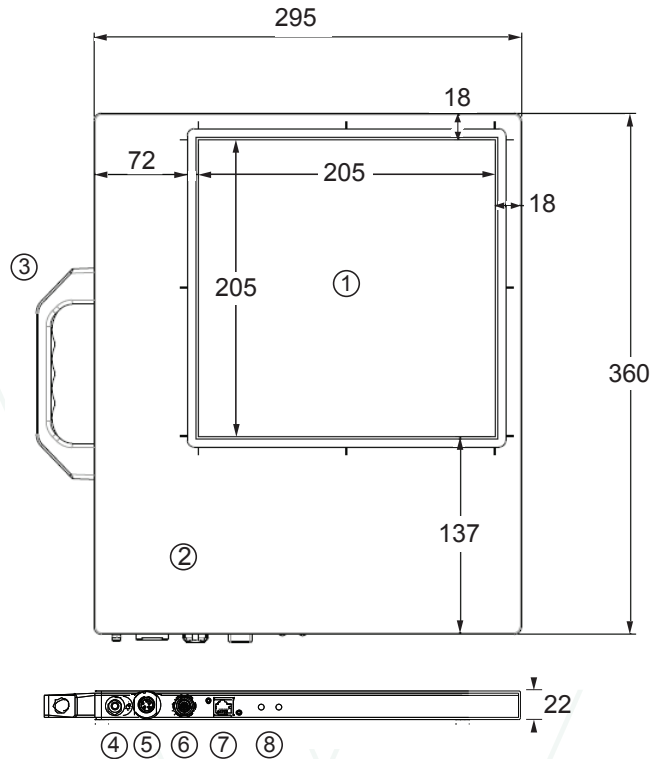

- ① Active sensor area
- ② Electronics area
- ③ Removable handle
- ④ Ground stud
- ⑤ Power connector
- ⑥ X-ray trigger connector
- ⑦ Ethernet connector (RJ45)
- ⑧ Diagnostic LEDs



USA HEADQUARTERS  
Salt Lake City, UT  
P: +1-801-972-5000

GERMANY  
Walluf  
P: +49-6123-971-300

CHINA  
Wuxi  
P: +86 510 8820-1652

For a complete listing of our global offices, visit [www.vareximaging.com](http://www.vareximaging.com)

© 2024 Varex Imaging Corporation. All Rights reserved. Production of any of the material contained herein in any format or media without the express written permission of Varex Imaging Corporation is prohibited.