

**DESCRIPTION:**

Heat Exchanger (oil to water).  
For use with B-130H, B-150H, B-160H and B-180H housings.

**PERFORMANCE:**

2.0 kW with the following conditions:  
1) 2 GPM Water Flow (36°C)

**OIL HOSES:**

1/2 inch Male NPT

**WATER HOSES**

Parker-Push-Lok 801-6

**POWER REQUIREMENTS:**

105 - 125 VAC 50/60 Hz 3.0 Amps

**DIMENSIONS:**

Width 9.980 inches (253 mm)  
Length 9.090 inches (231 mm)  
Height 5.210 inches (132 mm)

**WEIGHT:**


13 lbs. 4 oz dry (6.01 kg)

**THERMAL PROTECTION UNIT (TPU):**

Switches at 95°C ±5°C  
Manual Reset




### Cooling Characteristics

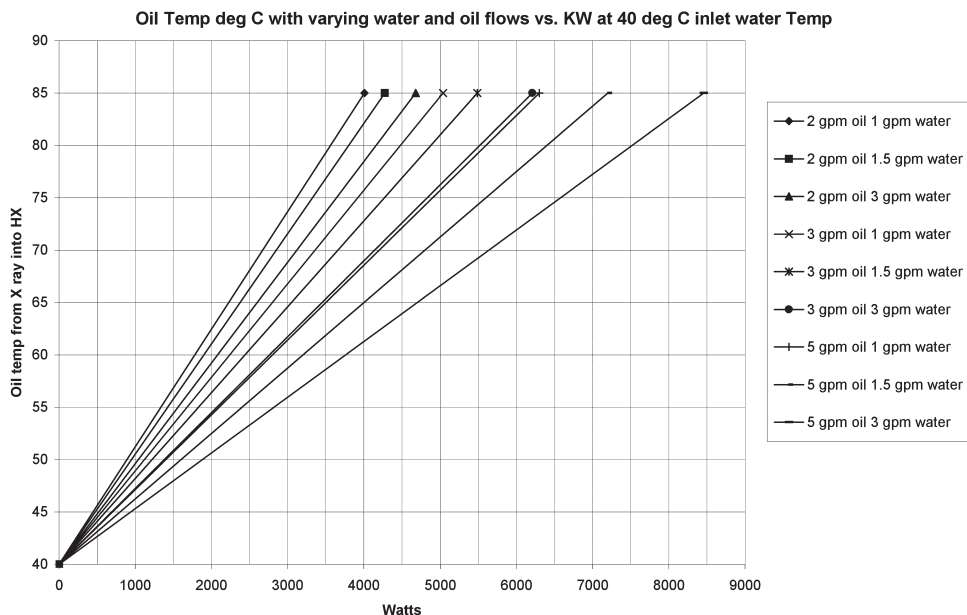

### Outline Drawing

Dimensions are for reference only

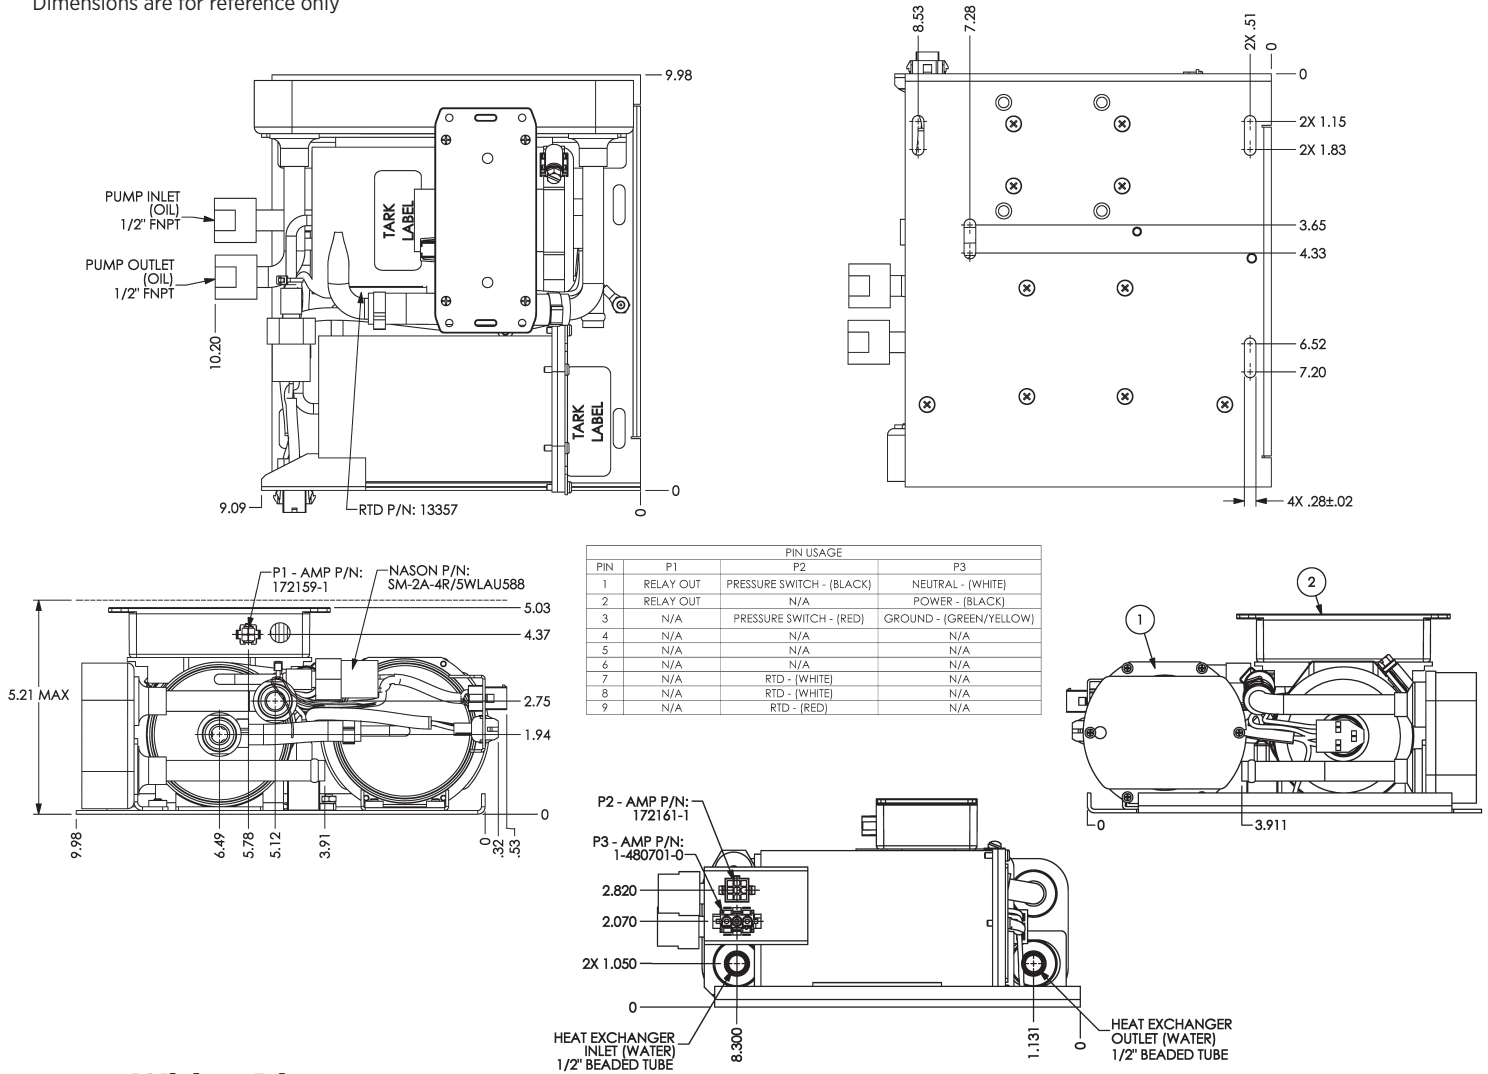

### Wiring Diagram

